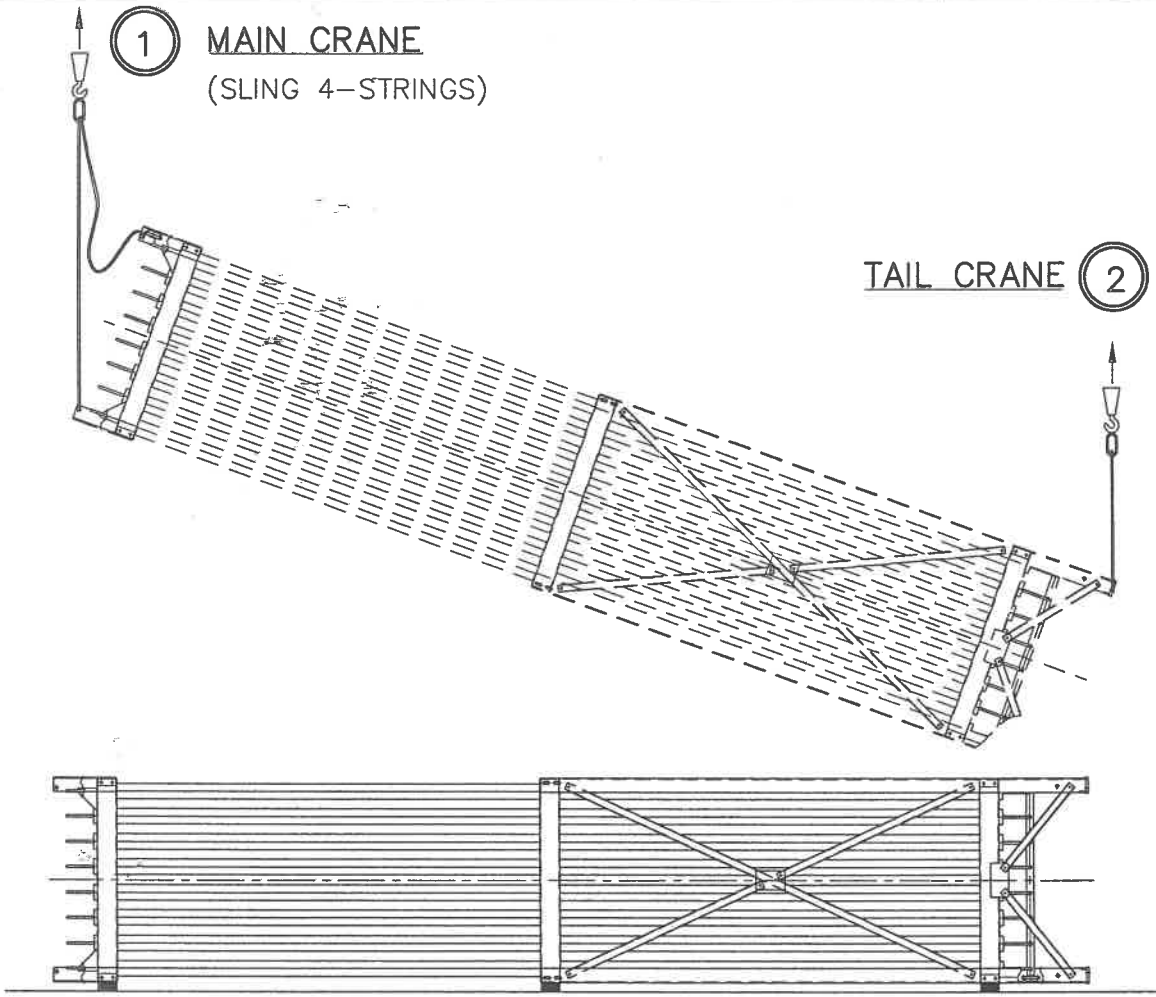

UNLOADING OF VAPORISER FROM TRUCK

Fasten chain (consisting of four parts) to each end of each upper leg (at the lifting lug topside of the vaporiser and the hole of footplate at the bottom side) and place the vaporisers next to the truck.
Now loosen the chains from the two feet-ends and attach these to the other (lower) lifting lugs topside.
Small vaporisers are not equipped with lifting lugs because of the low weight. Lifting can be done with polyester woven lifting slings.

WARNING

Do not lift with forklift truck on the fintubes, which would inevitably lead to serious damage!

ERECTION OF VAPORISERS

Tighten chain slowly and start lifting using bottom footplates as centre of rotation.

WARNING

Watch balance of vaporiser carefully, keep strained lifting wires vertical in laterally displacing the holsting point: when nearing the vertical atrive for 4 strained wires before final tilt in vertical position, and this now perfectly controlled.

REMARK:
An unrestricted exposure to natural atmospheric air circulation is vital for amblent air heated vaporisers in order to perform to standarde. Therefore do not place vaporisers near a wall or building, In a closed-in courtyard, etc.
place vaporisers as spacious and open / windy as possible.

WARNING: – DO NOT LIFT WITH FORK LIFT TRUCK
– WATCH BALANCE OF VAPORISER CAREFULLY, DO NOT DEFLECT!

REV.	DESCRIPTION	BY	CH'D	DATE
.	.	.		.
.	.	.		.
.	.	.		.
1	COMMENTS CLIENT	TvD		01–09–10

cryonorm
KOPERWEG 3
2401 LH ALPHEN A/D RIJN
THE NETHERLANDS
PHONE: +31 (0) 172 - 41 80 80
FAX: +31 (0) 172 - 43 68 19
WEB: WWW.CRYONORM.NL
E-MAIL: SALES@CRYONORM.NL

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF CRYONORM B.V. AND MAY NOT BE COPIED, MADE PUBLIC OR SHOWN TO THIRD PARTIES WITHOUT OUR WRITTEN CONSENT.

ELEVATION INSTRUCTION CNLP 8x8x10.000

DRAWN: TvD	DATE: 23–08–10	FILE: CN2100130–37.dwg
CHECKED: –	DATE: –	SCALE: N.V.T.

DRAWING NUMBER	SIZE	REV
CN2100130–37 A	A3	1